


ROADTHUNDER®

RTL15-04

Wiring Configuration


La Configuración del alambrado, La Configuración del alambrado, Verdrahtende Konfiguration

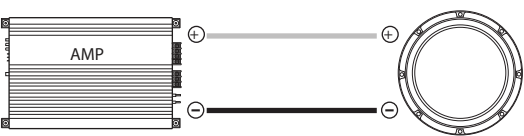

Wired Direct (Alambró Directo, Télégraphié Direct, Direkt hat verdrahtet)

A 4Ω speaker will represent a 4Ω load.


(Un orador 4Ω representará una carga 4Ω, Un 4Ω haut-parleur représentera un 4Ω chargent, Ein 4Ω Sprecher beladen eine 4Ω wird vertreten)

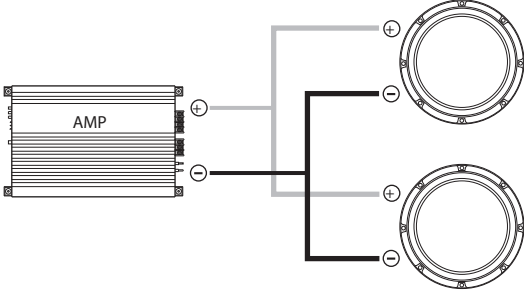

Two Speakers wired in parallel (Dos Oradores alambraron en la paralela, Deux Haut-parleurs ont télégraphié dans l'analogie, Zwei Sprecher haben parallel verdrahtet):

A 4Ω speaker will represent a 2Ω load.


(Un orador 4Ω representará una carga 2Ω, Un 4Ω haut-parleur représentera un 2Ω chargent, Ein 4Ω Sprecher beladen eine 2Ω wird vertreten)

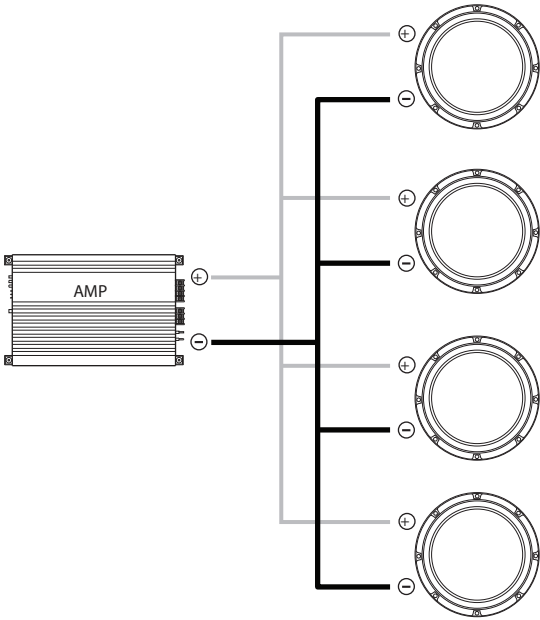

Four Speakers wired in parallel (Cuatro Oradores alambraron en la paralela, Quatre Haut-parleurs ont télégraphié dans l'analogie, Vier Sprecher haben parallel verdrahtet):

A 4Ω speaker will represent a 1Ω load.

(Un orador 4Ω representará una carga 1Ω, Un 4Ω haut-parleur représentera un 1Ω chargent, Ein 4Ω Sprecher beladen eine 1Ω wird vertreten)

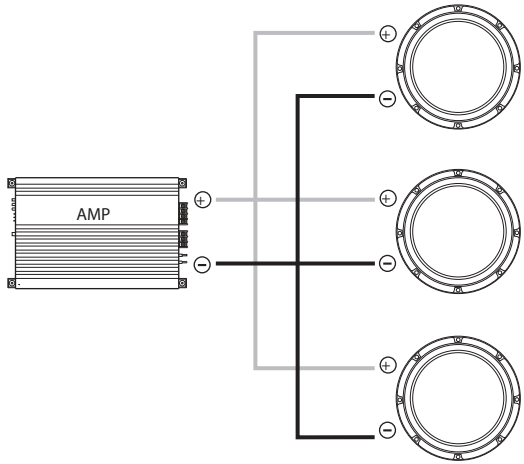

Three Speakers wired in parallel (Tres Oradores alambraron en la paralela, Trois Haut-parleurs ont télégraphié dans l'analogie, Drei Sprecher haben parallel verdrahtet):

A 4Ω speaker will represent a 1.3Ω load.

(Un orador 4Ω representará una carga 1.3Ω, Un 4Ω haut-parleur représentera un 1.3Ω chargent, Ein 4Ω Sprecher beladen eine 1.3Ω wird vertreten)




ROADTHUNDER®

RTL15-04

Parameters



Los parámetros, Paramètres, Parameter

Fs: 25 Hz
Qms: 4.81
Cms: 0.172 mm/N
Mms: 231 g
Rms: 7.695 kg/s
Vas: 5.876 ft³ (166.4 liters)
Xmax: 0.37 in (9.398 mm)
D: 12.8 in (325 mm)
Sd: 128.7 in² (830 cm²)
Vd: 47.619 in³ (0.78 liters)
Qes: 0.68
Re: 3.96 Ω
Bl: 14.6 Tm
Prms: 200 Watts
Qts: 0.596
η_o: 0.369%
SPL_o: 87.7 dB
SPL 2.83V/1m: 90.7 dB

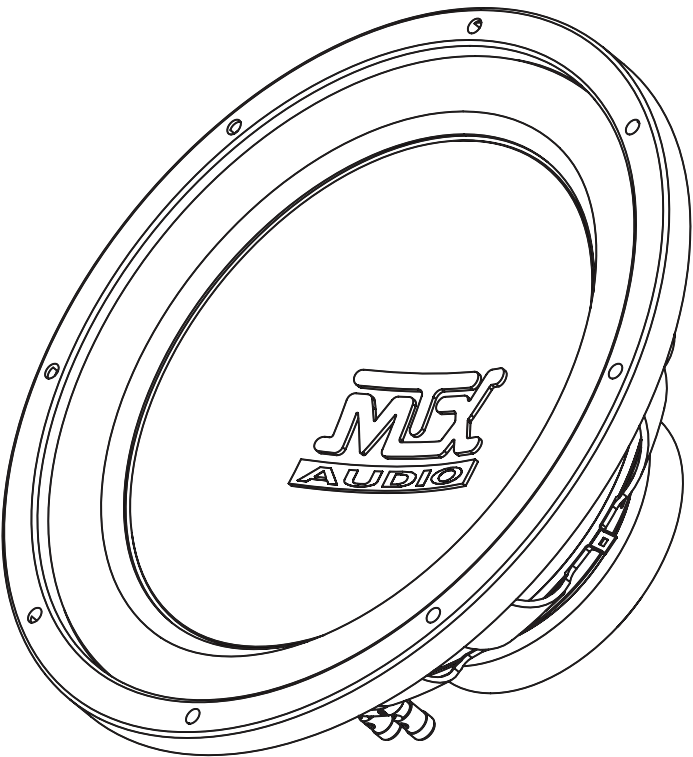

Specifications

Las especificaciones, Specifications, Spezifikationen

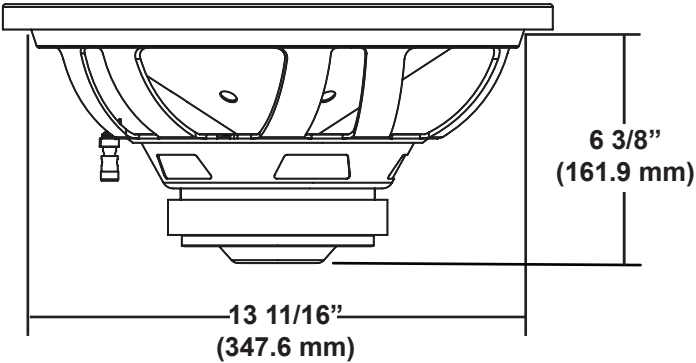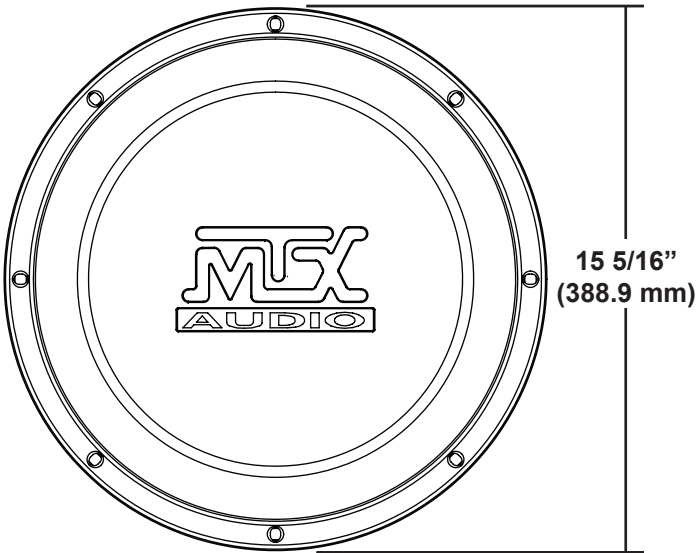

Recommended Power Rating of 100 - 200 Watts RMS

La Potencia nominal recomendada, Le Pouvoir recommandé Evaluant, Empfohlene Kraft Einzuschätze



ROADTHUNDER®

RTL15-04

Sealed Enclosure

El Cerco sellado, Cloture scellée, Abgedichtete Einschließung


For the best possible sound quality where space is a premium, MTX recommends using a sealed enclosure. For excellent sound quality with increased output compared to sealed enclosures (3dB or more), MTX recommends using a vented enclosure. All recommended enclosures have been designed and thoroughly tested by MTX.

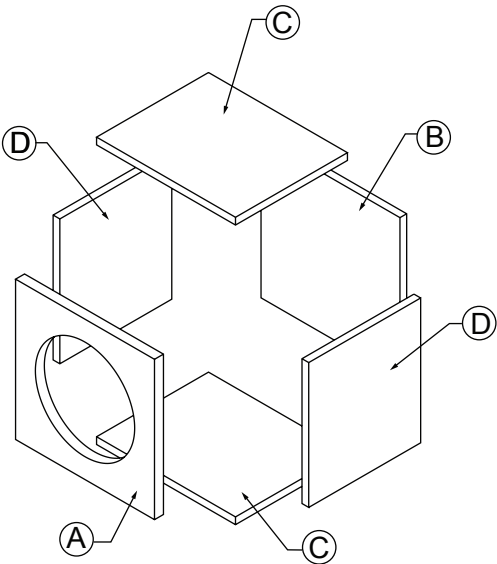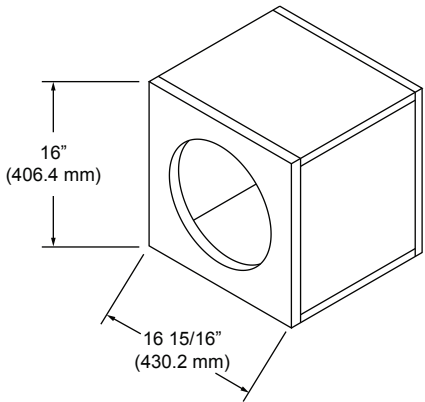


Net Internal Volume: 1.5 ft³

Parts List


La Lisat de partes, Liste de parties, Ersatzteilliste

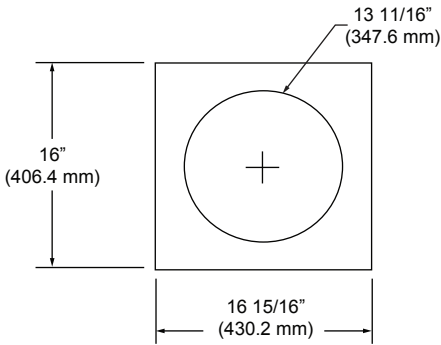


[A] - 3/4" (19 mm) MDF

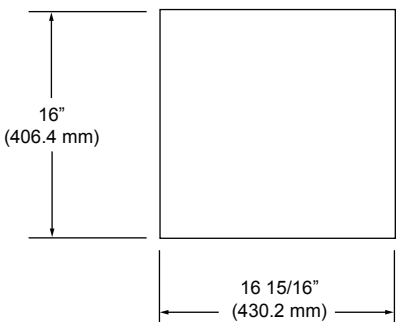

[B] - 3/4" (19 mm) MDF

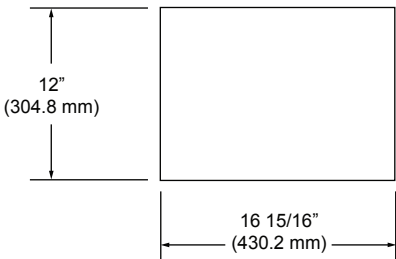

[C] - 3/4" (19 mm) MDF



[D] - 3/4" (19 mm) MDF



ROADTHUNDER®

RTL15-04

Vented Enclosure

Descargar Cerco, Clôture donnere vent, Vented Einschließung


For the best possible sound quality where space is a premium, MTX recommends using a sealed enclosure. For excellent sound quality with increased output compared to sealed enclosures (3dB or more), MTX recommends using a vented enclosure. All recommended enclosures have been designed and thoroughly tested by MTX.

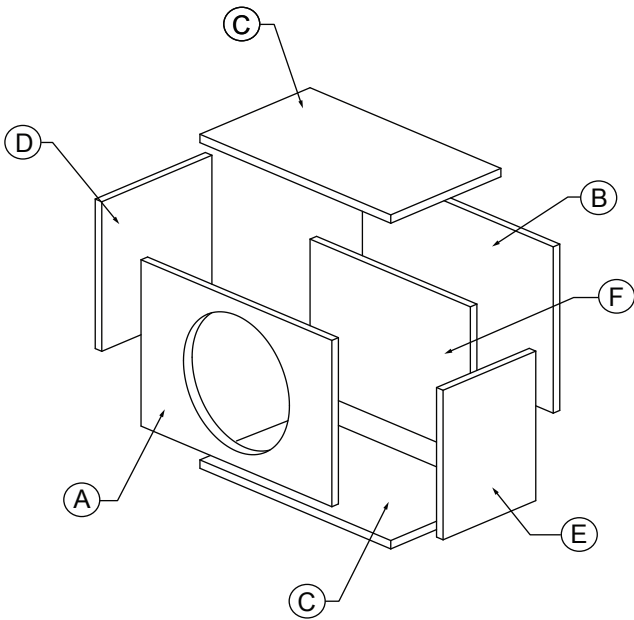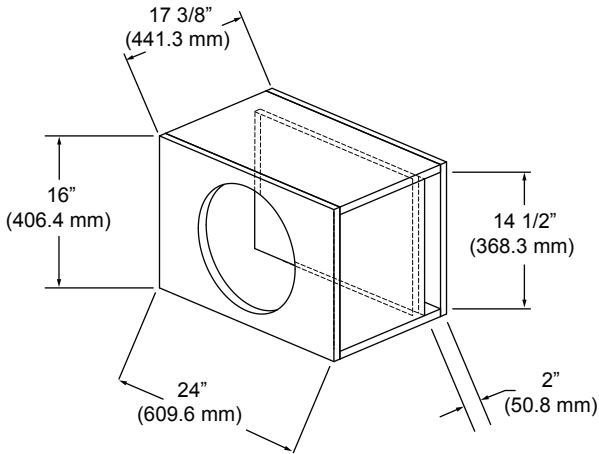


Net Internal Volume: 2.48 ft³

Parts List


La Lisat de partes, Liste de parties, Ersatzteilliste

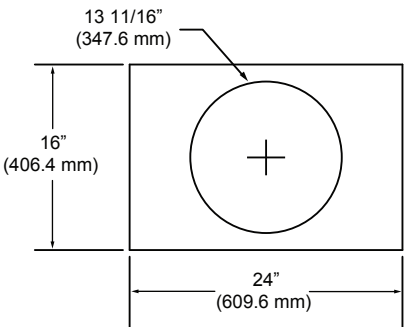


[A] - 3/4" (19 mm) MDF

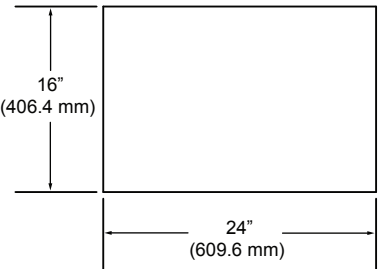


[B] - 3/4" (19 mm) MDF

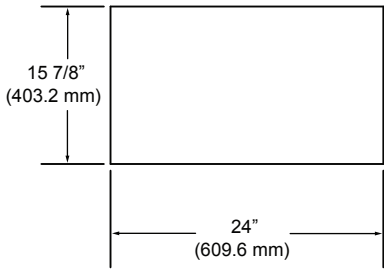


[C] - 3/4" (19 mm) MDF



[D] - 3/4" (19 mm) MDF



[E] - 3/4" (19 mm) MDF



[F] - 3/4" (19 mm) MDF